

# Kvaser BlackBird v2 User's Guide



Copyright 2011-2014 Kvaser AB, Mölndal, Sweden  
<http://www.kvaser.com>

Printed Thursday 20<sup>th</sup> March, 2014

We believe that the information contained herein was accurate in all respects at the time of printing. Kvaser AB cannot, however, assume any responsibility for errors or omissions in this text. Also note that the information in this document is subject to change without notice and should not be construed as a commitment by Kvaser AB.

(This page is intentionally left blank.)

## Contents

<b>1</b>	<b>About this manual</b>	<b>3</b>
<b>2</b>	<b>Introduction</b>	<b>4</b>
2.1	Welcome to Kvaser BlackBird v2 . . . . .	4
2.2	Major features of Kvaser BlackBird v2 . . . . .	5
2.3	Additional software and documentation . . . . .	5
<b>3</b>	<b>Kvaser BlackBird v2 hardware</b>	<b>6</b>
3.1	Installation . . . . .	6
3.2	USB . . . . .	6
3.3	CAN . . . . .	6
3.4	Power supply . . . . .	6
3.5	LED indicators . . . . .	7
3.6	Use as a USB CAN interface . . . . .	7
3.7	Use as a Wireless CAN Interface . . . . .	8
3.8	Troubleshooting . . . . .	8
3.9	ERROR LED indicator . . . . .	8
<b>4</b>	<b>Appendices</b>	<b>10</b>
4.1	Technical data . . . . .	10
4.2	CAN connectors . . . . .	10
4.3	Updating the firmware . . . . .	12
4.4	CAN bus termination . . . . .	13
<b>5</b>	<b>Disposal and Recycling Information</b>	<b>14</b>
<b>6</b>	<b>Legal acknowledgements</b>	<b>15</b>
6.1	Usage warning . . . . .	15
6.2	Agency Approval . . . . .	16
6.3	USA . . . . .	16
6.4	RoHS compliance statement . . . . .	17
6.5	Patents, copyrights and trademarks . . . . .	17
<b>7</b>	<b>Version history</b>	<b>18</b>

## 1 About this manual

This manual is intended for Kvaser BlackBird v2 users. This document contains a description of the hardware's properties and general instructions for connecting the device to a computer. The Kvaser BlackBird setup software is started from the Kvaser Hardware program in the control panel.

For information about how to set up a WLAN connection to the Kvaser BlackBird v2, see the Kvaser BlackBird Getting Started Guide.

## 2 Introduction

This section will describe the functions and features of the Kvaser BlackBird v2.

### 2.1 Welcome to Kvaser BlackBird v2



Figure 1: Kvaser BlackBird v2

The Kvaser BlackBird v2 is a small, yet advanced, wireless CAN interface. Configured via the USB interface, the Kvaser BlackBird v2 can be used as a wireless CAN interface or as a USB CAN interface.

This guide applies to Kvaser BlackBird v2 devices listed in Table 1.

Device	Product Number
Kvaser BlackBird v2	73-30130-00671-3
Kvaser BlackBird v2 OBDII	73-30130-00675-1

Table 1: Kvaser BlackBird v2 devices and its EAN numbers

Throughout this document, we use the name Kvaser BlackBird v2 to mean any one of the different Kvaser BlackBird v2 products listed in Table 1, unless otherwise noted.

## 2.2 Major features of Kvaser BlackBird v2

- Wireless CAN interface
- Supports 802.11b/g/n
- Infrastructure and Ad-hoc mode
- Supports WPA2/WPA/WEK encryption
- Supports Kvaser REST API
- Can be either public or private.
- USB CAN interface
- Supports extreme data throughput and prevents bottlenecks with quick reaction times and precise time stamping.
- Supports both 11-bit (CAN 2.0A) and 29-bit (CAN 2.0B active) identifiers.
- Large on-board RAM buffer for CAN messages
- Supports silent mode for analysis tools – listen to the bus without interfering.
- 100 % compatible with applications written for other Kvaser CAN hardware with Kvaser CANlib.
- High-speed CAN connection (compliant with ISO 11898-2), up to 1 Mbit/s.
- Fully compatible with J1939, CANopen, NMEA 2000 and DeviceNet.
- One USB 2.0 HiSpeed connection with data rates up to 480 Mbit/s while being compatible with USB 1.x and USB 3.0.
- Power supplied through the CAN bus interface or the USB interface. The device automatically switches between the CAN (primary) and the USB (secondary) power supply, reducing the power drain on a laptop's battery.
- Rugged aluminum housing.

## 2.3 Additional software and documentation

- Kvaser CANlib SDK, which includes everything you need to develop software for the Kvaser CAN hardware. Includes full documentation and many sample programs, written in C, C++, C#, Delphi, and Visual Basic. All Kvaser CAN interface hardware shares a common software API. Programs written for one device type will run without modification on other device types!
- On-line documentation in Windows HTML Help and Adobe Acrobat format.
- The latest versions of documentation, software and drivers can be downloaded for free at <http://www.kvaser.com/download/>.

## 3 Kvaser BlackBird v2 hardware

In this section you can read more about the installation, hardware, power supply and LED indicators.

### 3.1 Installation

The Kvaser BlackBird v2 delivery package contains:

- Kvaser BlackBird v2.
- Software and Driver media containing Kvaser CANlib and drivers for Windows; Kvaser BlackBird Setup Tool; Kvaser CANKing, an easy to use CAN bus monitor; Drivers for RP1210A, LabView, and DIAdem; and Kvaser CANlib Software Development Kit.
- Kvaser Quick Start Instruction.

After installing Kvaser Windows drivers, you may connect the Kvaser BlackBird v2 and Windows will install the appropriate driver.

The Kvaser BlackBird v2 may be inserted in any free USB socket on the host computer.

For information on how to upgrade the firmware, see Chapter 4.3, Updating the firmware, on Page 12.

### 3.2 USB

The Kvaser BlackBird v2 has a standard USB type "A" connector.

### 3.3 CAN

The Kvaser BlackBird v2 offers different CAN connectors depending on the model. A 9-pin DSUB or a 16-pin OBDII connector. See Chapter 4.2, CAN connectors, on Page 10 for details about the different connectors.

### 3.4 Power supply

The Kvaser BlackBird v2 can be powered from the CAN side or from the USB side. The device automatically switches between the CAN (primary) and the USB (secondary) power supply, reducing the power drain on a laptop's battery.

To operate the Kvaser BlackBird v2 as a wireless CAN interface, you must supply power on the CAN side. To use the device as a USB CAN interface or to configure the device, power on the USB side is sufficient.

### 3.5 LED indicators



Figure 2: LEDs on the Kvaser BlackBird v2

The LED indicators have somewhat different meaning depending on how your Kvaser BlackBird v2 is being used – as a CAN interface or a wireless interface. Table 2 describes the general purpose of each LED.

LED	General meaning
CAN (Yellow)	Status for CAN channel.
INFO (Orange)	General Information.
ERROR (Red)	Indicates temporary or permanent errors.
WLAN (Blue)	WLAN status.
POWER (Green)	Power and general status.

Table 2: LEDs on the Kvaser BlackBird v2

### 3.6 Use as a USB CAN interface

To use the Kvaser BlackBird v2 as a USB CAN interface; connect the unit to a free USB port on your PC or USB hub.



When used as a USB CAN interface, the POWER LED will be illuminated and the CAN LED will emit short flashes when CAN messages are transmitted and received.



### 3.7 Use as a Wireless CAN Interface

To use the Kvaser BlackBird v2 as a Wireless CAN interface, supply power through the CAN connector and disconnect the USB connector.



When used as a Wireless CAN interface, the POWER LED will be illuminated and the CAN LED will emit short flashes when CAN messages are transmitted and received. When the WLAN LED is constantly illuminated, the BlackBird is connected as a CAN interface and the wireless communication is stable.

### 3.8 Troubleshooting

Use “Kvaser Hardware” in the Control Panel to verify that the computer can communicate with the Kvaser BlackBird v2. If the firmware version shown is all zeroes, there are communication problems.

If the LEDs are not flashing or illuminated at all, check the power supply.



For further troubleshooting, see the trouble shooting section in the Kvaser BlackBird Getting Started Guide.

### 3.9 ERROR LED indicator

Sometimes the ERROR LED indicator can give more information about the cause of failure.

ERROR LED Signal	Auxiliary Signal	General Meaning
Blink	CAN LED blinks	CAN channel is in error passive mode
Slower blink	CAN LED blinks	CAN channel is bus off
Short flash	-	Error frame detected

Table 3: ERROR LED Indicator Signals

A steady light on ERROR LED is used to indicate a variety of situations. Check the other LED signals to identify the issue.

LED	Signal	General Meaning
INFO LED	1 short blink	CAN overrun
INFO LED	5 short blinks	Major error
INFO LED	6 short blinks	WLAN failure
POWER LED	fast blink	Software problems: configuration, parameters, firmware

Table 4: Steady ERROR LED Signals

## 4 Appendices

In this section you will find technical information about the Kvaser BlackBird v2 and its connectors.

### 4.1 Technical data

In Table 5 you will find the Kvaser BlackBird v2's technical specifications.

CAN Channels	1 (CAN 2.0A and 2.0B active).
CAN Transceivers	TJA1051T (Compliant with ISO 11898-2)
CAN Controller	Built into the processor
CAN Bit Rate	40 kbit/s to 1 Mbit/s
Time stamp resolution	25 $\mu$ s
Error Frame Detection	Yes
Error Frame Generation	Yes
PC interface	Supports USB 2.0 HiSpeed at 480 Mbit/s. Compatible with USB 1.1 at 12 Mbit/s and with USB 3.0 at 480 Mbit/s.
Wireless communication	WLAN 802.11b/g/n, 2.4 GHz, (infrastructure and ad hoc-mode)
Wireless security	WPA2 / WPA / WEP128 / WEP64
External power	Allowed operating voltage 9 - 40 V DC. Maximum input voltage 48 V DC.
Power consumption	Typical values are: 370 mA if powered from the USB (~5 V). 4.2 W for single channel powered from the CAN bus.
Hardware configuration	Done by software (Plug & Play).
Software requirements	Windows (XP with SP3 or later). (For other operating systems, see Kvaser web or contact Kvaser support.)
Dimensions	30 x 190 x 20 mm
Weight	165 g including cables and connectors.
Operating temperature	-40 °C to +70 °C
Storage temperature	-55 °C to +90 °C
Relative Humidity	0 % to 85 % (non-condensing.)

Table 5: Technical Specifications.

### 4.2 CAN connectors

The Kvaser BlackBird v2 using the 9-pin D-SUB connector (see Figure 3 on Page 11) has the pinning described below (see Table 6 on Page 11).




Figure 3: The D-SUB connector pin numbers

D-SUB pin number	Function
1	Not connected
2	CAN_L
3	GND
4	Not connected
5	Shield
6	Not connected.
7	CAN_H
8	Not connected.
9	Power supply to the device

Table 6: Configuration of the 9-pin DSUB

The Kvaser BlackBird v2 using the 16-pin OBDII plug (see Figure 4) has the pinning described in Table 7.

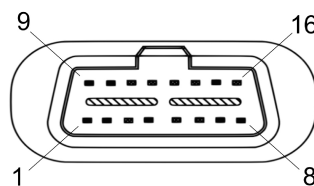


Figure 4: OBDII Connector

OBDII pin number	Function
4	GND
6	CAN_H
14	CAN_L
16	Power supply to the device

Table 7: OBDII pin configuration (showing only connected pins)

### 4.3 Updating the firmware

For the Kvaser BlackBird v2 to communicate with the host computer, compatible versions of the Kvaser CANlib (including driver) and firmware must be installed. Read the Release Notes carefully.

The latest versions of firmware and drivers can be downloaded for free at <http://www.kvaser.com/download/>.

Connect the Kvaser BlackBird v2 to your PC with the USB cable. Start the update.exe application. A window opens where you should see the device listed if correctly connected to your PC (see Figure 5). Select the device to update and click the Next button.

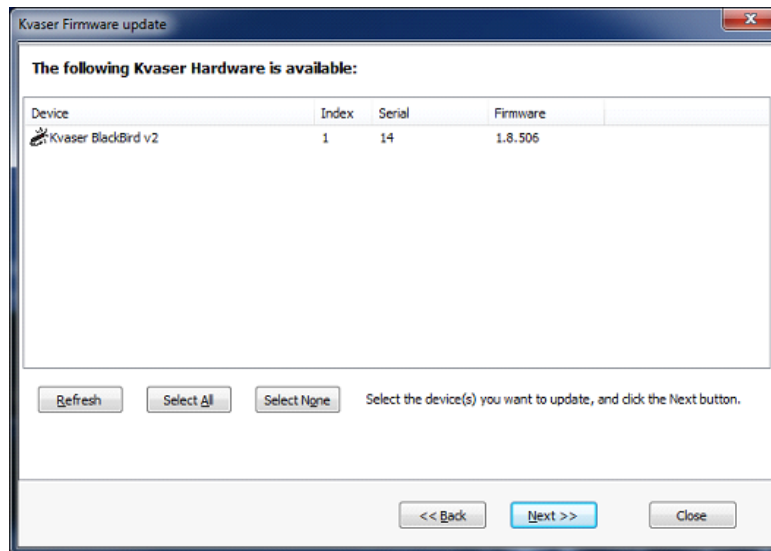


Figure 5: Firmware Update, Select Device

Click on the Start Upgrade button to start programming (see Figure 6 on Page 13). Programming takes approximately 30 seconds. The progress is displayed on the screen.

If you see any error messages, try to disconnect and reconnect the device, and then perform the operation again.

To verify that the firmware is updated,

- Open "Kvaser Hardware" in Control Panel. Select "Kvaser BlackBird v2" in the tree view to the left, and click on the channel. The firmware revision information appears in the right half of the window.

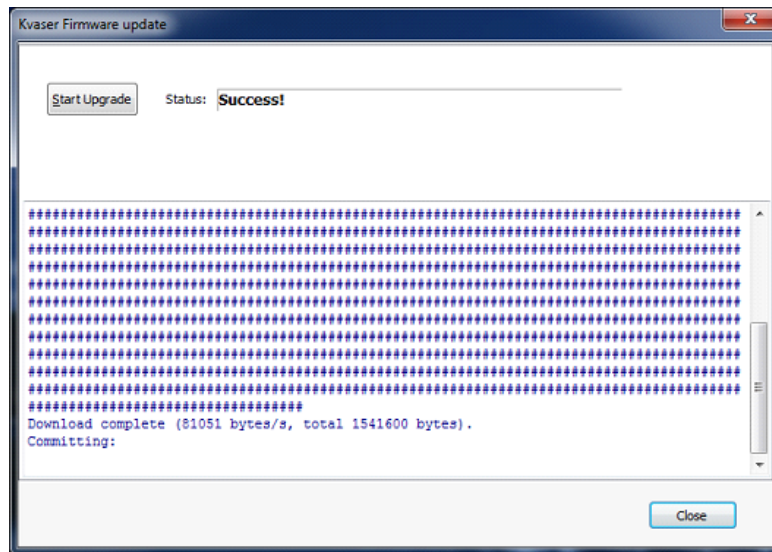


Figure 6: Firmware Update, Start Upgrade

#### 4.4 CAN bus termination

Every CAN bus must be terminated with a 120  $\Omega$  resistor at each end of the bus. The Kvaser BlackBird v2 does not contain any CAN bus termination, because inclusion could cause severe disturbance in a system which is already correctly terminated.

For laboratory or testing use, the exact value of the termination resistors is not always critical. Sometimes a single terminator is sufficient. For production, proper termination is essential. If you see error frames on the bus, you should check the termination.



To save yourself a lot of trouble, always terminate the CAN bus properly.

## 5 Disposal and Recycling Information



When this product reaches its end of life, please dispose of it according to your local environmental laws and guidelines.

For information about Kvaser's recycling programs, visit:  
<http://www.kvaser.com/en/kvaser/recycling-policy.html>

## 6 Legal acknowledgements

### 6.1 Usage warning



#### **WARNING FOR ALL USERS**

WARNING! - YOUR USE OF THIS DEVICE MUST BE DONE WITH CAUTION AND A FULL UNDERSTANDING OF THE RISKS!

THIS WARNING IS PRESENTED TO INFORM YOU THAT THE OPERATION OF THIS DEVICE MAY BE DANGEROUS. YOUR ACTIONS CAN INFLUENCE THE BEHAVIOR OF A CAN-BASED DISTRIBUTED EMBEDDED SYSTEM, AND DEPENDING ON THE APPLICATION, THE CONSEQUENCES OF YOUR IMPROPER ACTIONS COULD CAUSE SERIOUS OPERATIONAL MALFUNCTION, LOSS OF INFORMATION, DAMAGE TO EQUIPMENT, AND PHYSICAL INJURY TO YOURSELF AND OTHERS. A POTENTIALLY HAZARDOUS OPERATING CONDITION IS PRESENT WHEN THE FOLLOWING TWO CONDITIONS ARE CONCURRENTLY TRUE: THE PRODUCT IS PHYSICALLY INTERCONNECTED TO A REAL DISTRIBUTED EMBEDDED SYSTEM; AND THE FUNCTIONS AND OPERATIONS OF THE REAL DISTRIBUTED EMBEDDED SYSTEM ARE CONTROLLABLE OR INFLUENCED BY THE USE OF THE CAN NETWORK. A POTENTIALLY HAZARDOUS OPERATING CONDITION MAY RESULT FROM THE ACTIVITY OR NON-ACTIVITY OF SOME DISTRIBUTED EMBEDDED SYSTEM FUNCTIONS AND OPERATIONS, WHICH MAY RESULT IN SERIOUS PHYSICAL HARM OR DEATH OR CAUSE DAMAGE TO EQUIPMENT, DEVICES, OR THE SURROUNDING ENVIRONMENT.

WITH THIS DEVICE, YOU MAY POTENTIALLY:

- CAUSE A CHANGE IN THE OPERATION OF THE SYSTEM, MODULE, DEVICE, CIRCUIT, OR OUTPUT.
- TURN ON OR ACTIVATE A MODULE, DEVICE, CIRCUIT, OUTPUT, OR FUNCTION.
- TURN OFF OR DEACTIVATE A MODULE, DEVICE, CIRCUIT, OUTPUT, OR FUNCTION.
- INHIBIT, TURN OFF, OR DEACTIVATE NORMAL OPERATION.
- MODIFY THE BEHAVIOR OF A DISTRIBUTED PRODUCT.
- ACTIVATE AN UNINTENDED OPERATION.
- PLACE THE SYSTEM, MODULE, DEVICE, CIRCUIT, OR OUTPUT INTO AN UNINTENDED MODE.

ONLY THOSE PERSONS WHO:

(A) ARE PROPERLY TRAINED AND QUALIFIED WITH RESPECT TO THE USE OF THE DEVICE,

(B) UNDERSTAND THE WARNINGS ABOVE, AND

(C) UNDERSTAND HOW THIS DEVICE INTERACTS WITH AND IMPACTS THE FUNCTION AND SAFETY OF OTHER PRODUCTS IN A DISTRIBUTED SYSTEM AND THE APPLICATION FOR WHICH THIS DEVICE WILL BE APPLIED, MAY USE THE DEVICE.

PLEASE NOTE THAT YOU CAN INTEGRATE THIS PRODUCT AS A SUBSYSTEM INTO HIGHER-LEVEL SYSTEMS. IN CASE YOU DO SO, KVASER AB HEREBY DECLARES THAT KVASER AB'S WARRANTY SHALL BE LIMITED TO THE CORRECTION OF DEFECTS, AND KVASER AB HEREBY EXPRESSLY DISCLAIMS ANY LIABILITY OVER AND ABOVE THE REFUNDING OF THE PRICE PAID FOR THIS DEVICE, SINCE KVASER AB DOES NOT HAVE ANY INFLUENCE ON THE IMPLEMENTATIONS OF THE HIGHER-LEVEL SYSTEM, WHICH MAY BE DEFECTIVE.



## 6.2 Agency Approval

### 6.2.1 R&TTE Declaration of Conformity (DoC)

The equipment comply with the applicable directive R&TTE 1999/5/EC and the following applicable standards EN 301 489-1 (1.8.1), EN 301 489-17 (2.1.1), EN 300 328 (1.7.1) and EN 60950-1 (2006).

We,

Kvaser AB Aminogatan 25A SE-431 53 Mölndal Sweden

declare under our sole responsibility that the product:

Product name: Kvaser BlackBird v2

Trademark: Kvaser

Model: Kvaser BlackBird v2, EAN: 73-30130-00671-3  
Kvaser BlackBird v2 OBDII, EAN: 73-30130-00675-1

to which this declaration relates is in conformity with the essential requirements and other relevant requirements of the R&TTE Directive (1999/5/EC).

The product is in conformity with the following standards and/or other normative documents: HEALTH & SAFETY (Art. 3(1)(a)): EN 60950-1 (2006) and A11 (2009), EN 62 311 (2008) EMC (Art. 3(1)(b)): EN 301 489-1 V1.8.1(2008), EN 301 489-17 V2.1.1(2009) SPECTRUM (Art 3(2)): EN 300 328 V1.7.1 (2006-10)

Notified body involved: HEALTH & SAFETY (Art. 3(1)(a)), EMC (Art. 3(1)(b) and SPECTRUM (Art 3(2)) tested by SGS Fimko oy

Technical file held by:

Kvaser AB Aminogatan 25A SE-431 53 Mölndal Sweden

Place and date of issue (of this DoC):

Mölndal 2013-06-10

Kent Lennartsson, Hardware Manager

## 6.3 USA

**NOTE:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause

harmful interference in which case the user will be required to correct the interference at his/her own expense.

**FCC Compliance**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device contains  
FCC ID: XF6-RS9110N1102

When using the Kvaser BlackBird v2 device, you will be exposed to some of the transmitted RF energy. This exposure is well below the prescribed limits in all national and international RF safety standards and regulations. For security reasons: This modular transmitter **MUST** have a separation distance of at least 20 cm between the antenna and the body of the user or nearby persons.

**6.4 RoHS compliance statement**

This product is manufactured in accordance with directive 2002/95/EC on the Restriction of the use of certain Hazardous Substances in electrical and electronic equipment (RoHS.)

**6.5 Patents, copyrights and trademarks**

All trademarks are the property of their respective owner. Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

Adobe, the Adobe logo, and Reader are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries.

DeviceNet is a Trademark of Open DeviceNet Vendor Association, Inc.

NMEA 2000 is the registered trademark of the National Marine Electronics Association, Inc.

The products described in this document are protected by U.S. patent 5,696,911 and 7,100,042.

## 7 Version history

Version history for document UG\_98105\_blackbird\_v2:

Revision	Date	Changes
4.0	2014-01-31	First public release.